




DURABLE SILICONE MATERIAL WITH A MATTE FINISH AND A SOFT TOUCH.

The material is 100 microns thick, and is perfect for designs to be cut with medium to large detail. The material is stretchable and prevents dye migration on sublimated polyester.

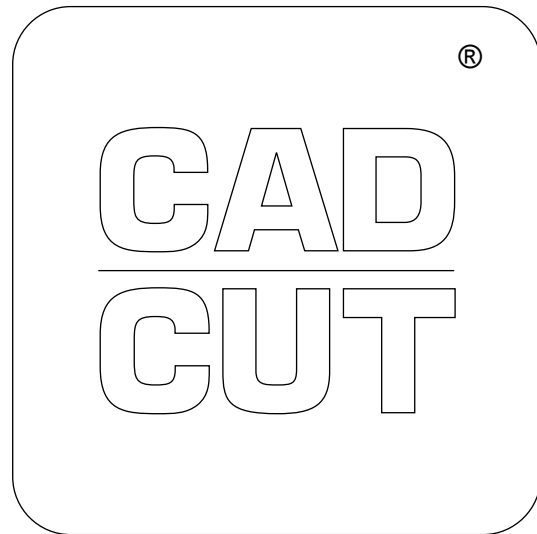

AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% Cotton
- 100% Polyester*
- Polyester-Cotton blends
- Sublimated Polyester

* Test before application!

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.5 mm (1/16") for lettering and logos.

APPLICATION INSTRUCTIONS

- Temperature: 150° C
- Time: 10 sec.
- Pressure: Medium (#4-6 on Hotronix®)
- Peel: Cold
- Repress: 5 sec.

MULTI-COLOR DESIGNS

CAD-CUT® Silicone is not suitable for multi-layer applications.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Do not dry clean. Iron only inside out.

STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.


DETAILS



KEY

Easy weed	Thin
Ironable	Sticky carrier
Ironable only inside out	Multi-color application
Washable	Peel hot
Sublimation	Application
Stretchable	Pressure
Flock	

CAD-CUT® SILICONE 100



001
white



200
red
ca. Pant. 186c



255
pastel pink
ca. Pant. 2036c



285
pastel purple
ca. Pant. 2071c



321
pastel blue
ca. Pant. 538c



320
light blue
ca. Pant. 2148c



300
royal blue
ca. Pant. 286c




380
turquoise
ca. Pant. 7717c



400
green
ca. Pant. 7727c



730
grey
ca. Pant. 422c



700
black